


APPLICATION GUIDE



TECHNICAL DATA

No. of Coats:	2-3
Coverage:	1L = approx 5m ²
Drying Time:	2-3 hrs @24°C
Fully Cured:	7 days
Cleanup:	Water
Shelf Life:	12 - 18mths
Store Below:	35°C
App.Temp:	5°C - 35°

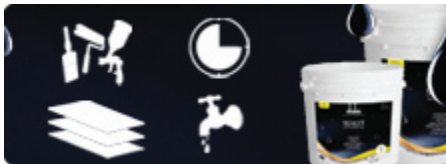

PRODUCT USES

- Clay & masonry bricks/blocks
- Cement render
- Concrete slabs
- Wet areas
- Fibre cement sheeting
- Leaking Showers
- Particle Board Flooring
- Coloured masonry
- Fishponds & troughs
- Fibre cement sheeting
- Concrete Tilt Panels
- Leaking Balconies
- Cement render
- Concrete slabs
- Terracotta pots
- Undercoats/sealer
- Concrete ponds
- Leaking Showers
- Sealing Screeds
- Fibro roofs
- Wet areas

DESCRIPTION

Shalex Sealit Multipurpose is a water based general purpose waterproofing compound designed for use on a wide variety of substrates.

Sealit Multipurpose is especially suited to sealing and protecting porous vertical masonry surfaces such as split faced or decorative concrete blocks.

Sealit Multipurpose dries to a clear low sheen finish and remains flexible to accommodate minor movement in the substrate. Sealit can be over painted with any acrylic paint. Due to exceptional adhesion Sealit is well suited as a primer for acrylic architectural topcoats, elastomers and roofing paints.

Sealit is not designed as a final coating for trafficable areas and should be over coated with a harder coating such as Shalex Glaze.

PREPARATION - THIS STEP MUST BE FOLLOWED

Dilute 1 part Sealit with 1 part clean water.

Apply liberally, flooding the surface working from top to bottom on vertical surfaces.

While still damp work back over original surface area to ensure area is fully coated.

Do not return unused compound to pail.

APPLICATION

Sealit Multipurpose is designed as a penetrative sealer. To ensure sufficient product is applied to the surface we recommend application with a backpack style low pressure sprayer (eg pesticide sprayer) as this allows a constant stream of Sealit to be applied at a consistent rate across the substrate.

Wet on wet application during priming is vital to ensure sufficient coverage and penetration.

Brush or rollers may be used for smaller areas (eg window sills, etc) but users should ensure liberal application with frequent brush or roller re-loading. Mask all areas not intended for waterproofing well prior to application.

Apply evenly to ensure a complete film covers the surface. Backrolling is advised to keep product in contact with the substrate for as long as possible

While Sealit Multipurpose is water based we recommend the use of gloves when using this product.